

6-Port 10/100Mbps Desktop Switch with 4-Port PoE+

Model: MS106LP


// Highlights

- 6× 10/100 Mbps RJ45 ports with 4 PoE+ ports
- With four PoE+ ports, transfers data and power on one single cable
- Support PoE Power up to 30 W for each PoE port and 40 W for all PoE ports*
- MS106LP provides 2× uplink ports when turning on the isolation mode
One for connecting to the Internet and one for connecting to the NVR.
- Increases PoE transmission distance to 250 m by Extend Mode*
- One click to divide traffic for specific ports for stability and security
- Works with IEEE 802.3af/at compliant PDs
- Allows for efficient heat dissipation and long network life
- Simple to use and saves time and effort
- Automatically reboots your dropped or unresponsive PoE-powered devices



// Connections

Network deployment made simple with Power over Ethernet.

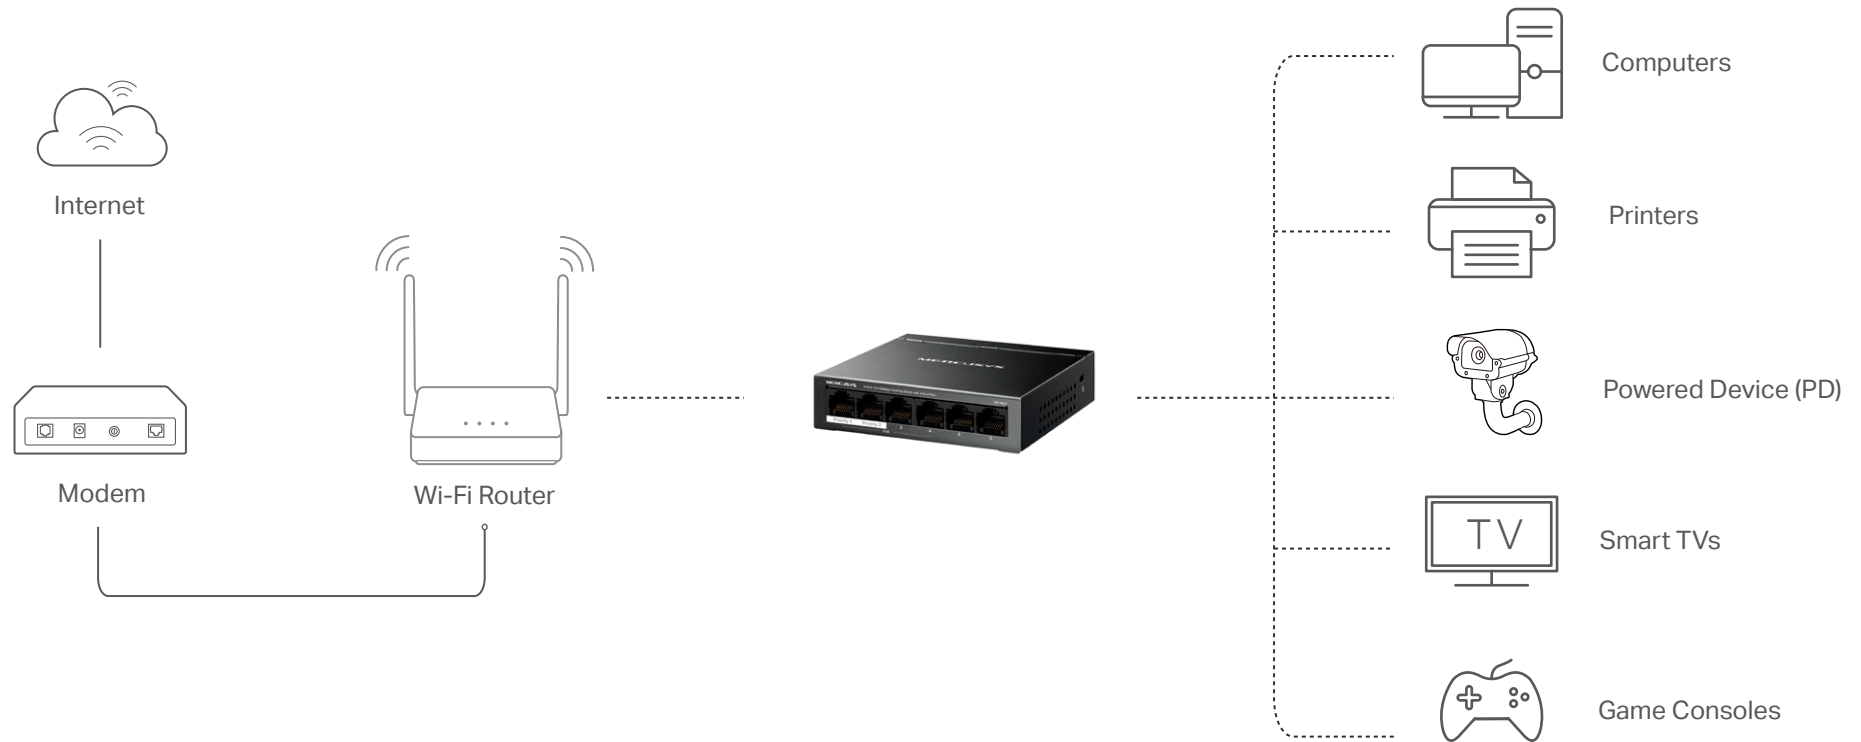

// Specifications

| | |
|-----------------------|--|
| Product Picture |  |
| Model | MS106LP |
| Standards | IEEE 802.3i, IEEE 802.3u, IEEE 802.3x |
| Interface | 6× 10/100 Mbps RJ45 ports |
| Network Media (Cable) | 10BASE-T:2-pair UTP/STP (≤100m) of Cat. 3 or above 100BASE-TX:2-pair UTP/STP (≤100m) of Cat. 5 or above |
| PoE | PoE Standard: compatible with 802.3af/at PDs PoE Port 1–4, up to 30 W per port PoE Power Budget 40 W* |
| Auto-Negotiation | YES |
| Auto MDI/MDIX | YES |
| PoE Power on RJ45 | Power+: pin 3 & pin 6 Power -: pin 1 & pin 2 |
| Max Power Consumption | 1.87W (22/50 Hz, no PD connected) 44.8W (220/50 Hz, with 40W PD connected) |
| Max Heat Dissipation | 6.34 BTU/h (no PD connected) 152.32 BTU/h (with 40 W PD connected) |
| Forwarding Mode | Store and Forward |
| Switch Capacity | 1.2 Gbps |
| MAC Address Table | 2k, Auto-learning, Auto-aging |
| Extend Mode | YES |
| Isolation Mode | YES |
| Recovery Mode | YES |
| Flow Control | YES |
| Fanless | YES |
| LED | Power, Link/Act, PoE Status |
| Dimensions | 99.8*98*25mm (3.9*3.9*1.0 in) |
| Certification | CE, RoHS |
| Environment | Operating Temperature: 0°C to 40°C (32°F to 104°F) Storage Temperature: -40°C to 70°C (-40°F to 158°F) Operating Humidity: 10% to 90% RH, non-condensing Storage Humidity: 5% to 90% RH, non-condensing |

// Package Contents

- 6-Port 10/100Mbps Desktop Switch with 4-Port PoE+ (MS106LP)
- Power Adapter
- Rubber Feet
- Quick Installation Guide

*PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.
 For more information, please visit www.mercusys.com